

2022~2023 | Railway Power Solutions Ruggedized DC/DC Converters Product Portfolio



Company Profile

TRACO Electronic AG is a Swiss company with headquarters based in Baar, Switzerland. As a leading power supply specialist with more than 40 years experience we are dedicated to the design and manufacturing of high quality DC/DC and AC/DC power conversion products.

TRACO markets its products worldwide under the registered trademark TRACO POWER. Our mission is to provide our customers with optimal power supply solutions in terms of performance, quality and cost for their individual application.

Ruggedized DC/DC Converters For Railway and Industrial Applications

Ruggedized DC/DC converters for railway and industrial applications must withstand highest mechanical and thermal stresses. Even our smallest converters are subject to stringent requirements on safety, design-life and environmental operating conditions. The corresponding standards **EN 50155** and **EN 61373** are internationally recognized for electronic equipment on rail vehicles and are widely regarded as a proof of fitness for extreme environments outside of the transportation sector as well. All our railway DC/DC converters come with additional **IEC/EN/UL 62368-1** approvals for a wide range of demanding applications.

EN 50155 defines the minimum input voltage requirements for DC/DC converters as follows:

Bus Voltage	Continuous input voltage range	Brownout 100 ms	Transient 1 sec	Recommended input voltage ranges
24 VDC	16.8–30.0 V	14.4 V	33.6 V	9–36 VDC (4:1 wide) or 14–160 VDC (12:1 ultra wide)
37.5 VDC	26.2–47.0 V	22.5 V	52.5 V	18–75 VDC (4:1 wide) or 14–160 VDC (12:1 ultra wide)
48 VDC	33.6–60.0 V	28.8 V	67.2 V	18–75 VDC (4:1 wide) or 14–160 VDC (12:1 ultra wide)
72 VDC	50.4–90.0 V	43.2 V	100.8 V	43–160 VDC (4:1 wide) or 14–160 VDC (12:1 ultra wide)
96 VDC	67.2–120.0 V	57.6 V	134.4 V	43–160 VDC (4:1 wide) or 14–160 VDC (12:1 ultra wide)
110 VDC	77.0–137.5 V	66.0 V	154.0 V	43–160 VDC (4:1 wide) or 14–160 VDC (12:1 ultra wide)

EN 50155 sets the following additional requirements:

- Galvanic isolation to protect electronic circuits
- Limits on emission and susceptibility with respect to conducted and radiated electromagnetic interference
- Safe operation at relative humidity levels up to 95% for 30 consecutive days

EN 61373 certification guarantees the ability to continuously operate under severe mechanical stresses:

- Random vibration – frequency range of 5–150 Hz @ 5grms (5hrs per axis)
- Shock – peak acceleration of 5g/2g/1g (duration: 50ms/20ms/20ms.)

All TRACO POWER railway solutions offer highest reliability in harsh environments. Our 4:1 wide and 12:1 ultra wide input voltage range DC/DC converters go beyond the requirements of the **EN 50155**. Continuous operation is permitted between –40 to +85°C ambient temperature. Operation at higher ambient temperatures is possible with favorable derating characteristics. All our PCB-mounted converters are fully encapsulated for protection against moisture and air particles. Certification according to **EN 61373** guarantees highest resistance against mechanical shocks and vibration. For selected models, an internal class A EMI filter limits electromagnetic interference. All railway DC/DC converters come with additional **IEC/EN/UL 62368-1** safety approvals and are qualified for fire behavior according to **EN 45545-2**. Our manufacturing processes are **ISO 9001** certified to ensure every single product is safe, reliable and of highest quality.

Note: All dimension drawings in mm (inch)

DC/DC Converters

3–300 Watt 4:1 | 12:1

Features

- EN 50155 railway approvals
 - Extended temperature range: –40°C to +85°C
 - Ruggedized designs, EN61373 compliant for shock & vibration
 - Wide and ultra-wide input voltage ranges: 9 – 36, 18 – 75, 43 – 160, 14 – 160 VDC
 - Suitable for applications in harsh environments
- RIA 12 surge filters
 - 3-year warranty

Additional Qualifications

- IEC/EN/UL 62368-1
- EN 45545-2
- RIA 12, NF F 01-510



Input / Surge Filter (RIA 12)

Watts	Series	Footprint	Connection	Input	Housing	I/O isolation	Function	Page
2	TFI	1.6" x 1"	THT	4:01	Encapsulated	–	RIA 12 surge filter	4

Ruggedized DC/DC Converters

for Railway & Industrial Applications

PCB Mount: 3~200 Watts

Watts	Series	Footprint	Connection	Input Range	Housing	I/O isolation	Special function	Page
3	TMR 3WIR	SIP-8	Through-hole	4:01	Encapsulated	3000 VDC		6
3	TEN 3WIRH	DIP-24	Through-hole	4:01	Encapsulated	4000 VAC	Remote on/off NEW!	6
6	TMR 6WIR	SIP-8	Through-hole	4:01	Encapsulated	3000 VDC		7
6	TEN 6WIRH	DIP-24	Through-hole	4:01	Encapsulated	4000 VAC	Remote on/off NEW!	7
8	TEN 8WI	DIP-24	Through-hole	4:01	Encapsulated	1500 VDC	Remote on/off	8
10	THN 10WIR	1.00 x 1.00"	Through-hole	4:01	Encapsulated	3000 VDC	Remote on/off	8
10	TEN 10WIRH	DIP-24	Through-hole	4:01	Encapsulated	4000 VAC	Remote on/off	9
15	THN 15WIR	1.00 x 1.00"	Through-hole	4:01	Encapsulated	3000 VDC	Remote on/off NEW!	9
20	THN 20WIR	1.00 x 1.00"	Through-hole	4:01	Encapsulated	3000 VDC	Remote on/off	10
20	TEN 20WIR	2.00 x 1.00"	Through-hole	4:01	Encapsulated	2250 VDC	Remote on/off	10
20	TEN 20WIRH	1.60 x 1.00"	Through-hole	4:01	Encapsulated	4000 VAC	Remote on/off NEW!	11
30	THN 30WIR	1.00 x 1.00"	Through-hole	4:01	Encapsulated	3000 VDC	Remote on/off NEW!	11
40	TEN 40WIR	2.00 x 1.00"	Through-hole	4:01	Encapsulated	2250 VDC	Remote on/off	12
40	TEN 40WIRH	2.00 x 1.00"	Through-hole	4:01	Encapsulated	4000 VAC	Remote on/off NEW!	12
40	TEP 40UIR	Quarter-brick	Through-hole	12:01	Encapsulated	3000 VDC	Remote on/off	13
60	TEN 60WIR	2.00 x 1.00"	Through-hole	4:01	Encapsulated	3000 VDC	Remote on/off	13
60	TEP 60UIR	Quarter-brick	Through-hole	12:01	Encapsulated	3000 VDC	Remote on/off	14
75	TEP 75WI	Half-brick	Through-hole	4:01	Encapsulated	3000 VDC	Remote on/off	14
100	TEP 100UIR	Quarter-brick	Through-hole	12:01	Encapsulated	3000 VDC	Remote on/off NEW!	15
100	TEP 100WIR	Half-brick	Through-hole	4:01	Encapsulated	3000 VDC	Remote on/off	15
150	TEP 150UIR	Half-brick	Through-hole	10:01	Encapsulated	3000 VAC	Remote on/off NEW!	16
160	TEP 160WIR	Half-brick	Through-hole	4:01	Encapsulated	3000 VDC	Remote on/off	16
200	TEP 200UIR	Half-brick	Through-hole	10:01	Encapsulated	3000 VDC	Remote on/off NEW!	17
200	TEP 200WIR	Half-brick	Through-hole	4:01	Encapsulated	3000 VDC	Remote on/off	17

Chassis Mount: 20~300 Watts

Watts	Series	Footprint	Connection	Input Range	Housing	I/O isolation	Special function	Page
20	TEQ 20WIR	4.10 x 2.30"	Spring clamp	4:01	Encased	2250 VDC		19
40	TEQ 40WIR	4.10 x 2.30"	Spring clamp	4:01	Encased	2250 VDC		19
100	TEQ 100WIR	4" x 3" x 3.5"	Spring clamp	4:01	Encased	3000 VDC		20
150	TEP 150WI	3.9" x 2.1"	Screw terminal	4:01	Encased	3000 VDC	Constant-current	20
160	TEQ 160WIR	4" x 3" x 3.5"	Spring clamp	4:01	Encased	3000 VDC		21
200	TEQ 200WIR	4" x 3" x 3.5"	Spring clamp	4:01	Encased	3000 VDC		21



Surge | Filter for Railway Systems

RIA12 - More aggressive than EN 50155,
1.5x for up to 1s – 3.5x for up to 20ms

Protection from potential surge sources such as:


- Switchover between neutral and energized zones
- Arcing from momentary loss of contact
- Change from coasting to traction mode
- Lightning strikes
- Opening/Closing main switch
- Operations on the electrical grid

TFI 20–300 Watt (RIA12 Surge | Filter Modules)

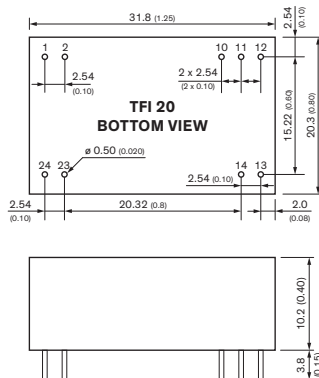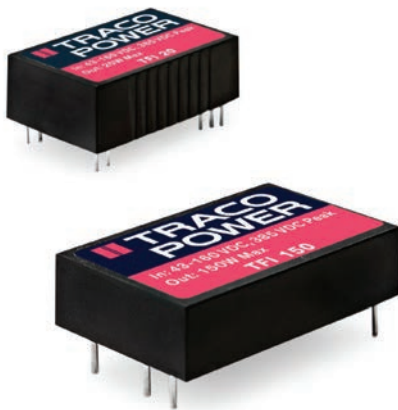

Pin-Out	
Pin	Function
1	+Vin
2	+Vin
10	+Vout
11	+Vout
12	+Vout
13	-Vout
14	-Vout
23	-Vin
24	-Vin

Model	Input voltage	Power max.
TFI 20	43–160 VDC	20 W
TFI 150	43–160 VDC	150 W
TFI 300	43–160 VDC	300 W

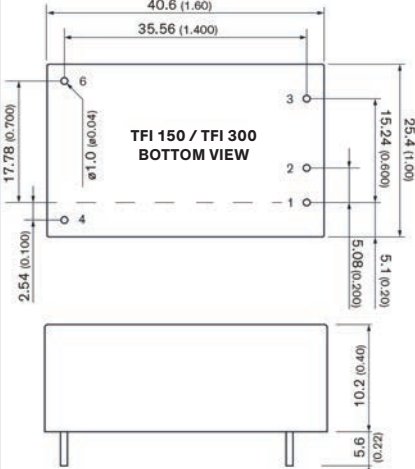

Pinout			
Pin	Function	Pin	Function
1	+Vin	4	+Vout
2	NC	6	-Vout
3	-Vin		


- Clamps over voltage transients (up to 385 VDC) at 168 VDC
- Use with any DC/DC converter
- Complies with RIA12, NF F 01-510 Surge susceptibilities
- Wide 43–160 VDC input range
Brownout voltage 36 VDC min.
- -40°C to +95°C temperature range

Ruggedized DC/DC Converters PCB Mount Models

EN 50155 Railway Certified | IEC/UL/EN 62368-1 Safety Approvals
EN61373 | MIL-810F Shock/Vibration/Thermal


3~200 Watt Products featuring:

- Ultra-Wide Input Ranges
- Extended Operating Temperatures
- Tightly regulated outputs
- $\geq 3,000$ VDC Isolation
- Over-Current & Short Circuit Protection
- 3 Year Warranty

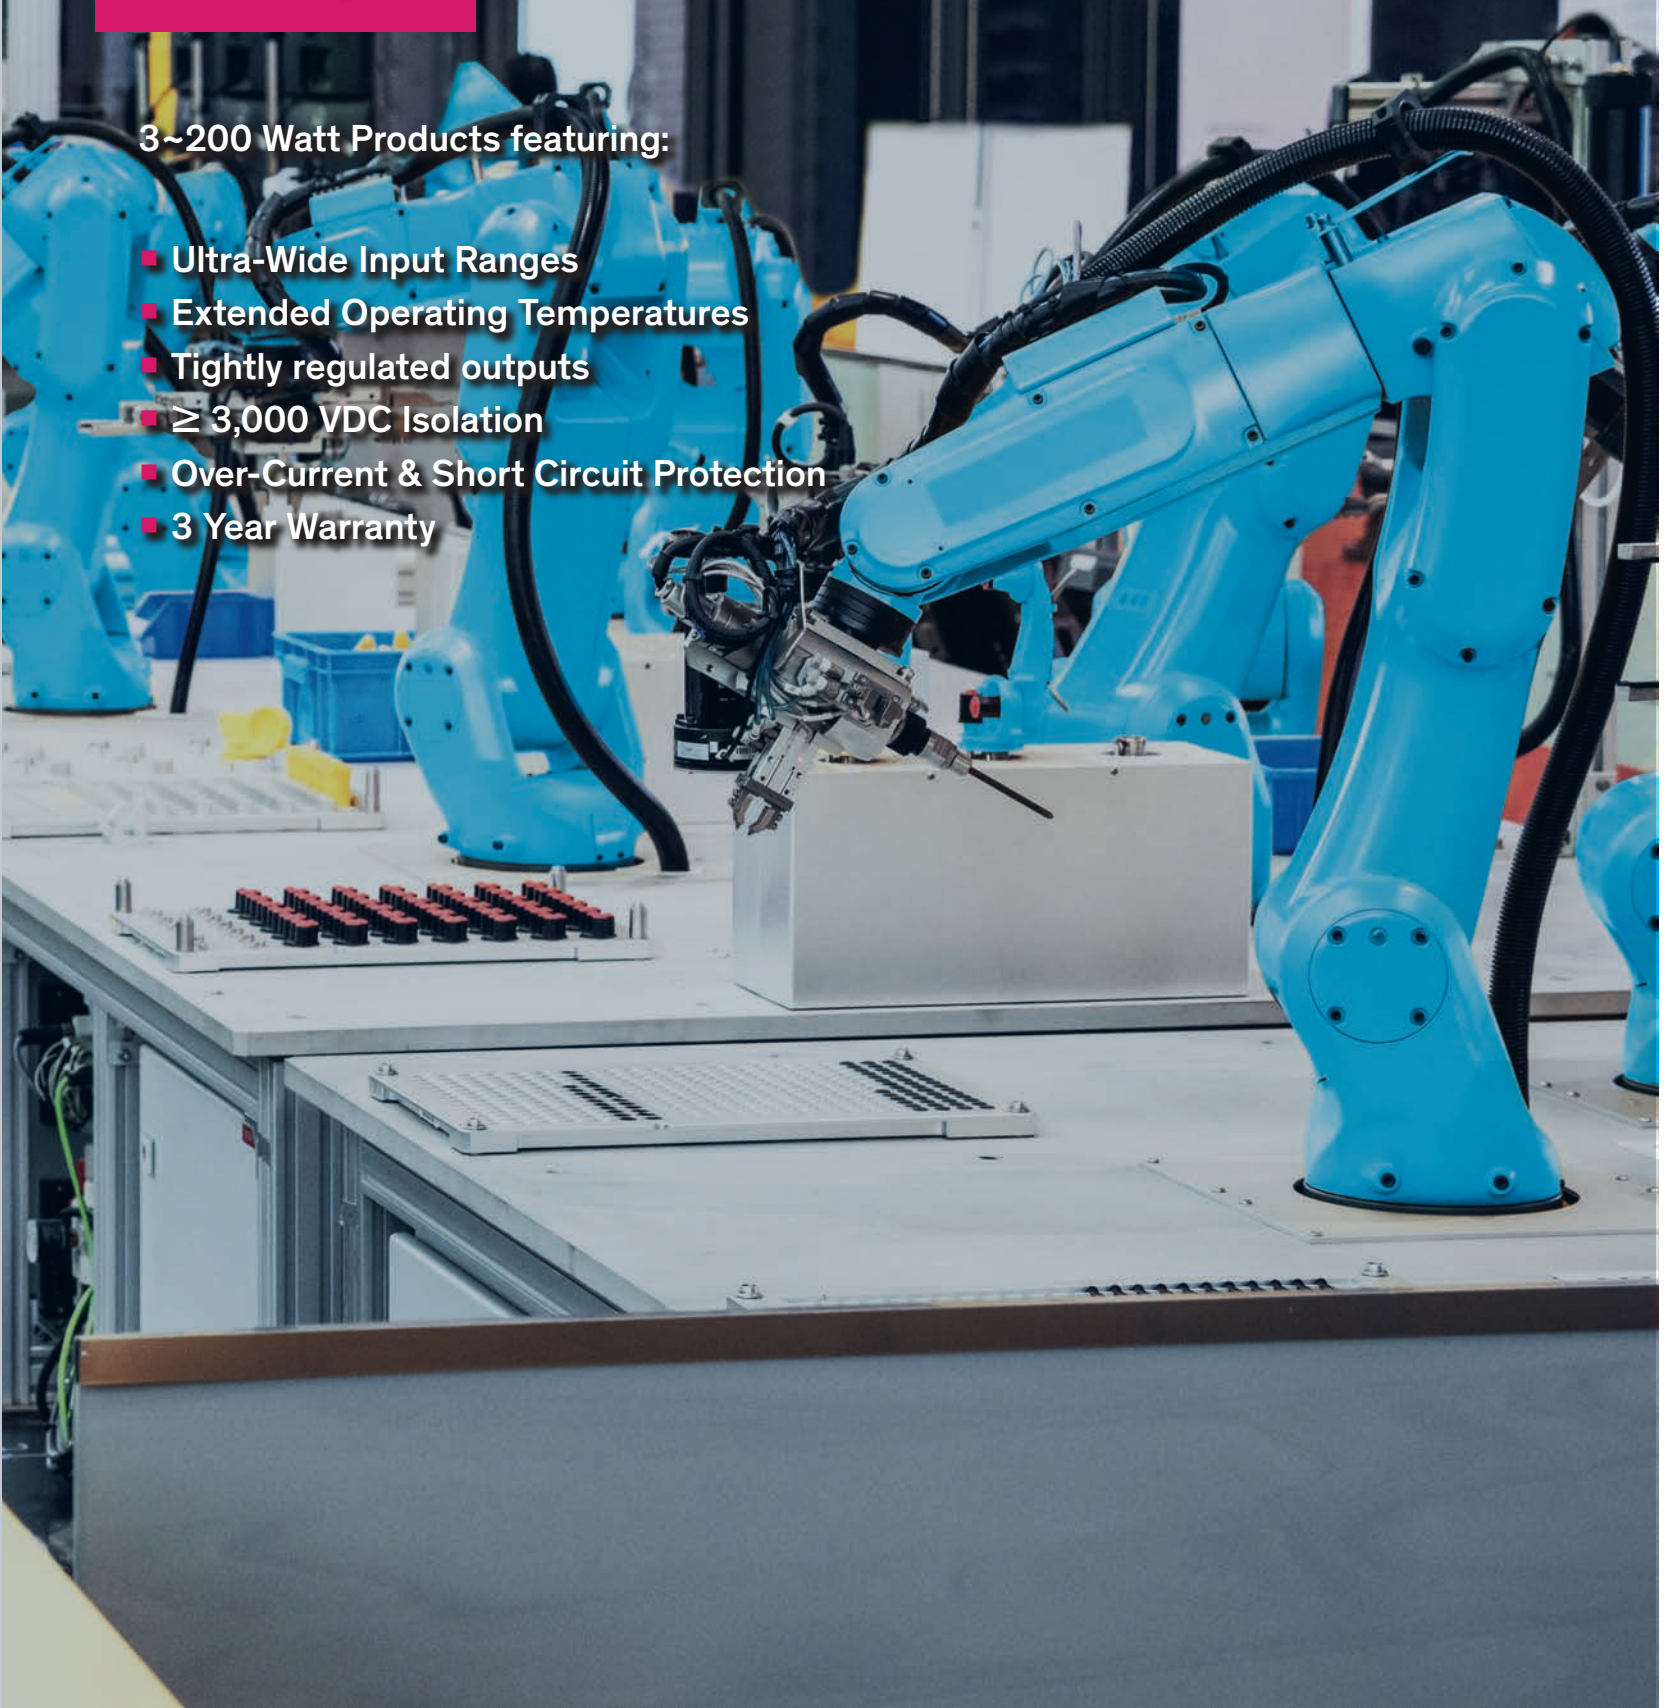

TMR 3WIR

3 Watt

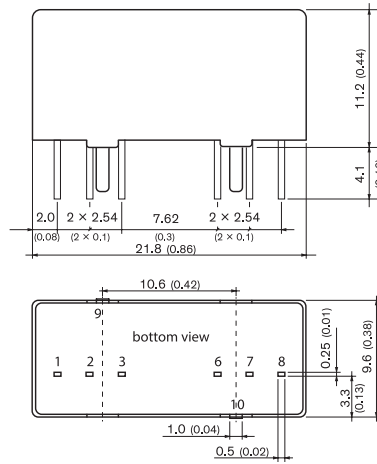

- SIP-8 metal case (0.86 x 0.38 x 0.44")
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- Ultra wide 4:1 Input: 9–36, 18–75 and 43–160 VDC
- I/O-isolation 3'000 VDC
- Fully regulated outputs
- -40°C to +90°C temperature range
- Short circuit protection and current limitation
- Remote on/off


Pinout		
Pin	Single Output	Dual Output
1	-Vin (GND)	-Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	Remote	Remote
6	+Vout	+Vout
7	-Vout	Common
8	NC	-Vout
9, 10	Case	Case

Model	Input Voltage Range	Output		Efficiency
		Vnom	I _{max}	
TMR 3-2410WIR	9 - 36 VDC (24 VDC nom.)	3.3 VDC	700 mA	76 %
TMR 3-2411WIR		5 VDC	600 mA	81 %
TMR 3-2419WIR		9VDC	333 mA	81 %
TMR 3-2412WIR		12 VDC	250 mA	83 %
TMR 3-2413WIR		15 VDC	200 mA	83 %
TMR 3-2415WIR		24 VDC	125 mA	82 %
TMR 3-2421WIR		± 5 VDC	300 mA	80 %
TMR 3-2422WIR		±12 VDC	125 mA	82 %
TMR 3-2423WIR		±15 VDC	100 mA	82 %
TMR 3-4810WIR		18 - 75 VDC (48 VDC nom.)	3.3 VDC	700 mA
TMR 3-4811WIR	5 VDC		600 mA	81 %
TMR 3-4819WIR	9VDC		333 mA	81 %
TMR 3-4812WIR	12 VDC		250 mA	82 %
TMR 3-4813WIR	15 VDC		200 mA	82 %
TMR 3-4815WIR	24 VDC		125 mA	82 %
TMR 3-4821WIR	± 5 VDC		300 mA	80 %
TMR 3-4822WIR	±12 VDC		125 mA	82 %
TMR 3-4823WIR	±15 VDC	100 mA	82 %	
TMR 3-7210WIR	43 - 160 VDC (110 VDC nom.)	3.3 VDC	700 mA	76 %
TMR 3-7211WIR		5 VDC	600 mA	80 %
TMR 3-7219WIR		9VDC	333 mA	81 %
TMR 3-7212WIR		12 VDC	250 mA	82 %
TMR 3-7213WIR		15 VDC	200 mA	83 %
TMR 3-7215WIR		24 VDC	125 mA	83 %
TMR 3-7221WIR		± 5 VDC	300 mA	80 %
TMR 3-7222WIR		±12 VDC	125 mA	83 %
TMR 3-7223WIR	±15 VDC	100 mA	81 %	

TEN 3WIRH

NEW!

3 Watt

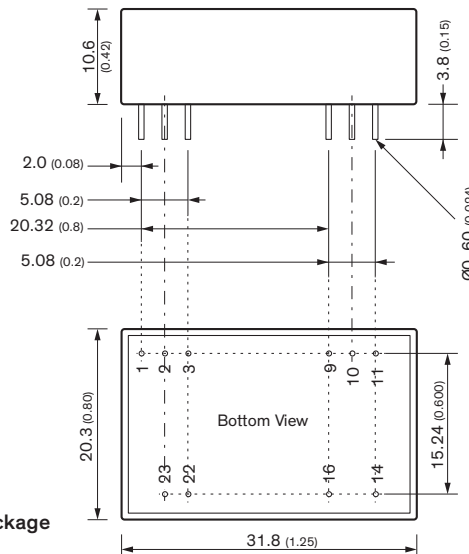


- Compact 1.25 x 0.85 x 0.4" DIP 24package
- Ultra-wide 4:1 input (36–160 VDC)
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- I/O-isolation 3'000 VDC
- High efficiency up to 85%
- -40°C to +90°C temperature range
- Under-voltage lock out circuit
- Vtrim and remote on/off

Model	Input Voltage Range	Output		Efficiency
		Vnom	I _{max}	
TEN 3-11010WIRH	36 - 160 VDC	3.3 VDC	1000 mA	80%
TEN 3-11011WIRH		5 VDC	600 mA	82%
TEN 3-11012WIRH		12 VDC	250 mA	85%
TEN 3-11013WIRH		15 VDC	200 mA	84%
TEN 3-11015WIRH		24 VDC	125 mA	85%
TEN 3-11021WIRH		±5 VDC	±300 mA	81%
TEN 3-11022WIRH		±12 VDC	±125 mA	84%
TEN 3-11023WIRH		±15 VDC	±100 mA	85%

Pinout		
Pin	Single	Dual
1	Ctrl	Ctrl
2	-Vin	-Vin
3	-Vin	-Vin
9	NC	Common
10	Trim (option)	Trim (option)
11	NC	-Vout
14	+ Vout	+ Vout
16	-Vout	Common
22	+ Vin	+ Vin
23	+ Vin	+ Vin

TMR 6WIR

6 Watt

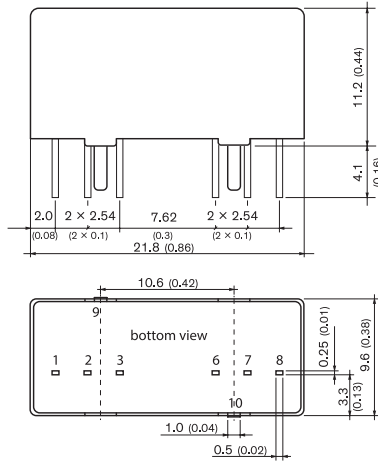

Model	Input Voltage Range	Output Vnom	I _{max}	Efficiency
TMR 6-2410WIR	9 - 36 VDC (24 VDC nom.)	3.3 VDC	1500 mA	81 %
TMR 6-2411WIR		5 VDC	1200 mA	84 %
TMR 6-2419WIR		9VDC	666 mA	86 %
TMR 6-2412WIR		12 VDC	500 mA	87 %
TMR 6-2413WIR		15 VDC	400 mA	88 %
TMR 6-2415WIR		24 VDC	250 mA	87 %
TMR 6-2421WIR		± 5 VDC	600 mA	84 %
TMR 6-2422WIR		±12 VDC	250 mA	87 %
TMR 6-2423WIR	±15 VDC	200 mA	87 %	
TMR 6-4810WIR	18 - 75 VDC (48 VDC nom.)	3.3 VDC	1500 mA	81 %
TMR 6-4811WIR		5 VDC	1200 mA	84 %
TMR 6-4819WIR		9VDC	666 mA	85 %
TMR 6-4812WIR		12 VDC	500 mA	87 %
TMR 6-4813WIR		15 VDC	400 mA	87 %
TMR 6-4815WIR		24 VDC	250 mA	87 %
TMR 6-4821WIR		± 5 VDC	600 mA	84 %
TMR 6-4822WIR		±12 VDC	250 mA	87 %
TMR 6-4823WIR	±15 VDC	200 mA	87 %	
TMR 6-7210WIR	43 - 160 VDC (110 VDC nom.)	3.3 VDC	1500 mA	80 %
TMR 6-7211WIR		5 VDC	1200 mA	83 %
TMR 6-7219WIR		9VDC	666 mA	85 %
TMR 6-7212WIR		12 VDC	500 mA	86 %
TMR 6-7213WIR		15 VDC	400 mA	86 %
TMR 6-7215WIR		24 VDC	250 mA	86 %
TMR 6-7221WIR		± 5 VDC	600 mA	83 %
TMR 6-7222WIR		±12 VDC	250 mA	86 %
TMR 6-7223WIR	±15 VDC	200 mA	86 %	


- SIP-8 metal case (0.86 x 0.38 x 0.44")
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- Ultra wide 4:1 Input: 9–36, 18–75 and 43–160 VDC
- I/O-isolation 3'000 VDC
- Fully regulated outputs
- -40°C to +80°C temperature range
- Short circuit protection and current limitation
- Remote on/off

Pinout		
Pin	Single Output	Dual Output
1	-Vin (GND)	-Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	Remote	Remote
6	+Vout	+Vout
7	-Vout	Common
8	NC	-Vout
9, 10	Case	Case

TEN 6WIRH

NEW!

6 Watt

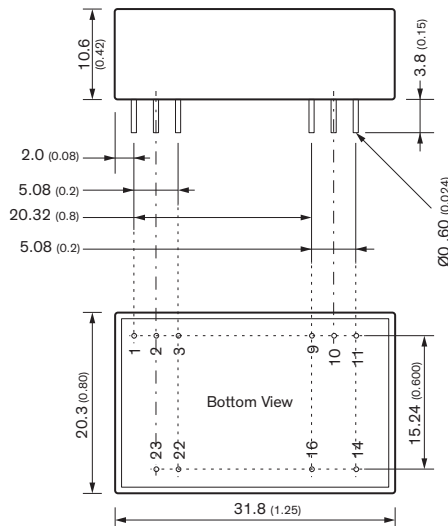


Model	Input Voltage Range	Output Vnom	I _{max}	Efficiency
TEN 6-11010WIRH	36 - 160 VDC	3.3 VDC	1800 mA	83%
TEN 6-11011WIRH		5 VDC	1200 mA	86%
TEN 6-11012WIRH		12 VDC	500 mA	87%
TEN 6-11013WIRH		15 VDC	400 mA	86%
TEN 6-11015WIRH		24 VDC	250 mA	86%
TEN 6-11021WIRH		±5 VDC	±600 mA	83%
TEN 6-11022WIRH		±12 VDC	±250 mA	86%
TEN 6-11023WIRH		±15 VDC	±200 mA	86%

- 1.25 x 0.85 x 0.4" DIP-24 package
- Ultra-wide input (36–160 VDC)
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- High efficiency up to 87%
- -40°C to +85°C temperature range
- Under-voltage lock out circuit
- Vtrim and remote on/off

Pinout		
Pin	Single	Dual
1	Ctrl	Ctrl
2	-Vin	-Vin
3	-Vin	-Vin
9	NC	Common
10	Trim (option)	Trim (option)
11	NC	-Vout
14	+ Vout	+ Vout
16	-Vout	Common
22	+ Vin	+ Vin
23	+ Vin	+ Vin

TEN 8WI

8 Watt

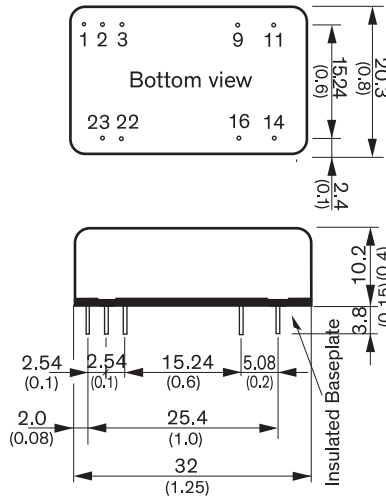


Model	Input Voltage Range	Output Vnom	I _{max}	Efficiency
TEN 8-2410WI	9 - 36 VDC (24 VDC nom.)	3.3 VDC	2400 mA	85 %
TEN 8-2411WI		5 VDC	1600 mA	87 %
TEN 8-2412WI		12 VDC	666 mA	86 %
TEN 8-2413WI		15 VDC	533 mA	86 %
TEN 8-2421WI		± 5 VDC	±800 mA	84 %
TEN 8-2422WI		±12 VDC	±333 mA	86 %
TEN 8-2423WI	±15 VDC	±267 mA	86 %	
TEN 8-4810WI	18 - 75 VDC (48 VDC nom.)	3.3 VDC	2400 mA	85 %
TEN 8-4811WI		5 VDC	1600 mA	87 %
TEN 8-4812WI		12 VDC	666 mA	87 %
TEN 8-4813WI		15 VDC	533 mA	88 %
TEN 8-4821WI		± 5 VDC	±800 mA	84 %
TEN 8-4822WI		±12 VDC	±333 mA	87 %
TEN 8-4823WI	±15 VDC	±267 mA	87 %	
TEN 8-7210WI	43 - 160 VDC (110 VDC nom.)	3.3 VDC	2400 mA	84 %
TEN 8-7211WI		5 VDC	1600 mA	85 %
TEN 8-7212WI		12 VDC	666 mA	86 %
TEN 8-7213WI		15 VDC	533 mA	86 %
TEN 8-7221WI		± 5 VDC	±800 mA	82 %
TEN 8-7222WI		±12 VDC	±333 mA	85 %
TEN 8-7223WI	±15 VDC	±267 mA	85 %	

- DIP-24 metal package (1.25 x 0.80 x 0.40")
- Ultra wide 4:1 input voltage range 9–36, 18–75, 43–160 VDC
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- High efficiency up to 88 %
- No minimum load required
- -40°C to +85°C temperature range
- Remote on/off
- Under voltage lock-out circuit
- Shielded metal case with insulated base plate

Pinout		
Pin	Single	Dual
1	Remote On/Off	Remote On/Off
2	-Vin (GND)	-Vin (GND)
3	-Vin (GND)	-Vin (GND)
9	ntc	Common
11	ntc	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

THN 10WIR

10 Watt

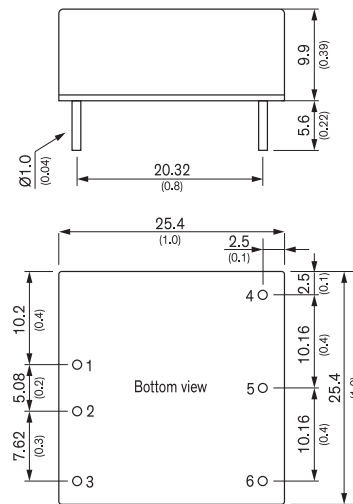


Model	Input Voltage Range	Output Vnom	I _{max}	Efficiency
THN 10-2410WIR	9 - 36 VDC (24 VDC nom.)	3.3 VDC	3000 mA	87 %
THN 10-2411WIR		5 VDC	2000 mA	89 %
THN 10-2412WIR		12 VDC	830 mA	89 %
THN 10-2413WIR		15 VDC	670 mA	90 %
THN 10-2415WIR		24 VDC	420 mA	90 %
THN 10-2421WIR		± 5 VDC	±1000 mA	86 %
THN 10-2422WIR	±12 VDC	±416 mA	89 %	
THN 10-2423WIR	±15 VDC	±333 mA	89 %	
THN 10-2425WIR	±24 VDC	±210 mA	90 %	
THN 10-4810WIR	18 - 75 VDC (48 VDC nom.)	3.3 VDC	3000 mA	87 %
THN 10-4811WIR		5 VDC	2000 mA	89 %
THN 10-4812WIR		12 VDC	830 mA	89 %
THN 10-4813WIR		15 VDC	670 mA	90 %
THN 10-4815WIR		24 VDC	420 mA	90 %
THN 10-4821WIR		± 5 VDC	±1000 mA	86 %
THN 10-4822WIR	±12 VDC	±416 mA	89 %	
THN 10-4823WIR	±15 VDC	±333 mA	89 %	
THN 10-4825WIR	±24 VDC	±210 mA	90 %	
THN 10-7210WIR	36 - 160 VDC (110 VDC nom.)	3.3 VDC	3000 mA	87 %
THN 10-7211WIR		5 VDC	2000 mA	88 %
THN 10-7212WIR		12 VDC	830 mA	89 %
THN 10-7213WIR		15 VDC	670 mA	89 %
THN 10-7215WIR		24 VDC	420 mA	89 %
THN 10-7221WIR		± 5 VDC	±1000 mA	85 %
THN 10-7222WIR	±12 VDC	±416 mA	89 %	
THN 10-7223WIR	±15 VDC	±333 mA	89 %	
THN 10-7225WIR	±24 VDC	±210 mA	89 %	

- Compact 1.0 x 1.0 x 0.4" package
- Ultra-wide 4:1 input voltage range 9–36, 18–75, 36–160 VDC
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- I/O-isolation 3'000 VDC
- High efficiency up to 90%
- -40°C to +90°C temperature range
- Under-voltage lock out circuit
- Vtrim and remote on/off

Pinout / Conecction		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	Trim	Common
6	-Vout	-Vout

THN 20WIR

20 Watt

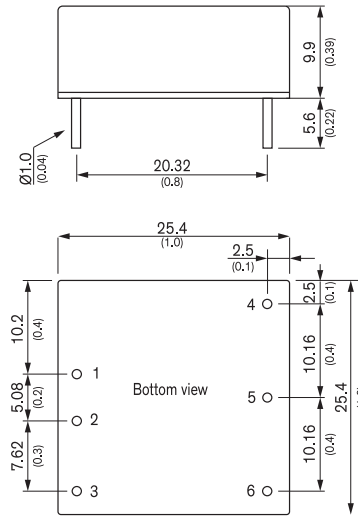


- Compact 1.0 x 1.0 x 0.4" package
- Ultra-wide 4:1 input voltage range 9–36, 18–75, 36–160 VDC
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- I/O-isolation 3'000 VDC
- High efficiency up to 91%
- -40°C to +90°C temperature range
- Under-voltage lock out circuit
- Vtrim and remote on/off

Pinout / Connection		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	Trim	Common
6	-Vout	-Vout

Model	Input Voltage Range	Output		Efficiency
		Vnom	I _{max}	
THN 20-2410WIR	9 - 36 VDC (24 VDC nom.)	3.3 VDC	5500 mA	88 %
THN 20-2411WIR		5 VDC	4000 mA	89 %
THN 20-2412WIR		12 VDC	1670 mA	89 %
THN 20-2413WIR		15 VDC	1330 mA	89 %
THN 20-2415WIR		24 VDC	833 mA	91 %
THN 20-2422WIR		±12 VDC	±833 mA	89 %
THN 20-2423WIR	±15 VDC	±667 mA	90 %	
THN 20-2425WIR	±24 VDC	±417 mA	91 %	
THN 20-4810WIR	18 - 75 VDC (48 VDC nom.)	3.3 VDC	5500 mA	89 %
THN 20-4811WIR		5 VDC	4000 mA	90 %
THN 20-4812WIR		12 VDC	1670 mA	89 %
THN 20-4813WIR		15 VDC	1330 mA	90 %
THN 20-4815WIR		24 VDC	833 mA	91 %
THN 20-4822WIR		±12 VDC	±833 mA	89 %
THN 20-4823WIR	±15 VDC	±667 mA	90 %	
THN 20-4825WIR	±24 VDC	±417 mA	91 %	
THN 20-7210WIR	36 - 160 VDC (110 VDC nom.)	3.3 VDC	5500 mA	89 %
THN 20-7211WIR		5 VDC	4000 mA	90 %
THN 20-7212WIR		12 VDC	1670 mA	90 %
THN 20-7213WIR		15 VDC	1330 mA	90 %
THN 20-7215WIR		24 VDC	833 mA	91 %
THN 20-7222WIR		±12 VDC	±833 mA	90 %
THN 20-7223WIR	±15 VDC	±667 mA	90 %	
THN 20-7225WIR	±24 VDC	±417 mA	91 %	

TEN 20WIR



20 Watt

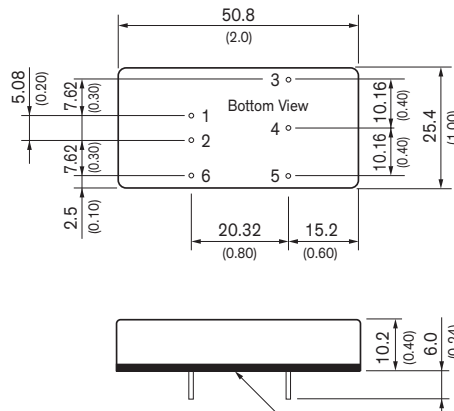

- 2.0 x 1.0 x 0.4" metal package
- Ultra wide 4:1 input voltage range 9–36, 18–75, 43–160 VDC
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- Input filter meets EN 55032 class B without external components
- High efficiency up to 89%
- No minimum load required
- -40°C to +85°C temperature range
- Under voltage lock-out circuit
- Vtrim (±10%) and remote on/off

Pinout / Connection		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote On/Off	Remote On/Off


Model	Input Voltage Range	Output		Efficiency
		Vnom	I _{max}	
TEN 20-2410WIR	9 - 36 VDC (24 VDC nom.)	3.3 VDC	4500 mA	85 %
TEN 20-2411WIR		5 VDC	4000 mA	88 %
TEN 20-2412WIR		12 VDC	1670 mA	89 %
TEN 20-2413WIR		15 VDC	1330 mA	88 %
TEN 20-2422WIR		±12 VDC	±833 mA	88 %
TEN 20-2423WIR		±15 VDC	±667 mA	99 %
TEN 20-4810WIR	18 - 75 VDC (48 VDC nom.)	3.3 VDC	4500 mA	85 %
TEN 20-4811WIR		5 VDC	4000 mA	88 %
TEN 20-4812WIR		12 VDC	1670 mA	89 %
TEN 20-4813WIR		15 VDC	1330 mA	89 %
TEN 20-4822WIR		±12 VDC	±833 mA	88 %
TEN 20-4823WIR		±15 VDC	±667 mA	89 %
TEN 20-7210WIR	43 - 160 VDC (110 VDC nom.)	3.3 VDC	4500 mA	85 %
TEN 20-7211WIR		5 VDC	4000 mA	87 %
TEN 20-7212WIR		12 VDC	1670 mA	88 %
TEN 20-7213WIR		15 VDC	1330 mA	88 %
TEN 20-7222WIR		±12 VDC	±833 mA	88 %
TEN 20-7223WIR		±15 VDC	±667 mA	89 %

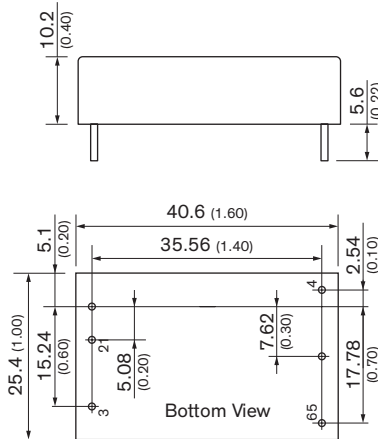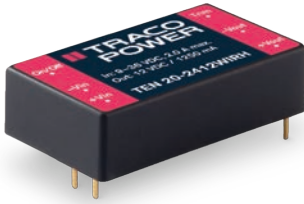

Model	Input Voltage Range	Output Vnom	I _{max}	Efficiency
TEN 20-11011WIRH	36 – 160 VDC	5.1 VDC	4000 mA	89%
TEN 20-11012WIRH		12 VDC	1670 mA	88.5%
TEN 20-11013WIRH		15 VDC	1330 mA	89%
TEN 20-11015WIRH		24 VDC	833 mA	88.5%
TEN 20-11021WIRH		±5 VDC	±2000 mA	86%
TEN 20-11022WIRH		±12 VDC	±833 mA	88.5%
TEN 20-11023WIRH		±15 VDC	±667 mA	89%

- 2.0 x 1.0 x 0.4" metal package
- Ultra wide 4:1 input (36-160 VDC)
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- High efficiency up to 89%
- -40°C to +85°C temperature range
- Under voltage lock-out circuit
- Remote On/Off
- Vtrim and remote on/off

Pinout		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	-Vout	-Vout
6	Trim	-Vout

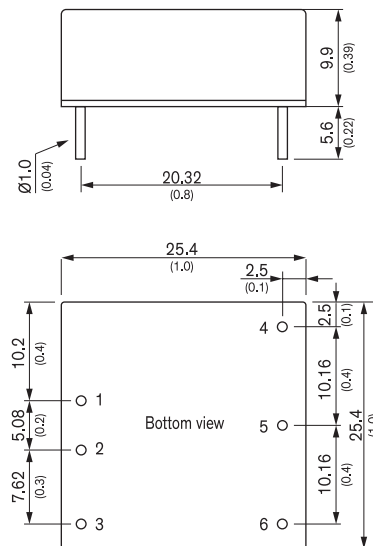


Model	Input Voltage Range	Output Vnom	I _{max}	Efficiency
THN 30-2410WIR	9 - 36 VDC (24 VDC nom.)	3.3 VDC	7000 mA	88 %
THN 30-2411WIR		5 VDC	6000 mA	89 %
THN 30-2412WIR		12 VDC	2500 mA	89 %
THN 30-2413WIR		15 VDC	2000 mA	89 %
THN 30-2415WIR		24 VDC	1250 mA	90 %
THN 30-2422WIR	18 - 75 VDC (48 VDC nom.)	±12 VDC	±1250 mA	89 %
THN 30-2423WIR		±15 VDC	±1000 mA	91 %
THN 30-2425WIR		±24 VDC	±625 mA	91 %
THN 30-4810WIR		3.3 VDC	7000 mA	88 %
THN 30-4811WIR		5 VDC	6000 mA	90 %
THN 30-4812WIR	12 VDC	2500 mA	90 %	
THN 30-4813WIR	15 VDC	2000 mA	91 %	
THN 30-4815WIR	24 VDC	1250 mA	92 %	
THN 30-4822WIR	36 - 160 VDC (110 VDC nom.)	±12 VDC	±1250 mA	91 %
THN 30-4823WIR		±15 VDC	±1000 mA	91 %
THN 30-4825WIR		±24 VDC	±625 mA	92 %
THN 30-7210WIR		3.3 VDC	7000 mA	88 %
THN 30-7211WIR		5 VDC	6000 mA	90 %
THN 30-7212WIR	12 VDC	2500 mA	90 %	
THN 30-7213WIR	15 VDC	2000 mA	90 %	
THN 30-7215WIR	24 VDC	1250 mA	91 %	
THN 30-7222WIR	36 - 160 VDC (110 VDC nom.)	±12 VDC	±1250 mA	90 %
THN 30-7223WIR		±15 VDC	±1000 mA	90 %
THN 30-7225WIR		±24 VDC	±625 mA	91 %

- 1.0 x 1.0 x 0.4" metal package
- Ultra wide 4:1 input (9-36/18-75/36-160 VDC)
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- I/O-isolation 3'000 VDC
- High efficiency up to 90%
- -40°C to +90°C temperature range
- Under voltage lock-out circuit
- Remote On/Off
- Vtrim and remote on/off

Pinout / Conecction		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	Trim	Common
6	-Vout	-Vout

TEN 40 WIR

40 Watt

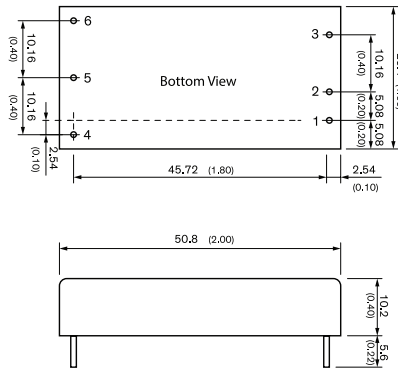

Model	Input Voltage Range	Output Vnom	I _{max}	Efficiency
TEN 40-2410WIR	9 - 36 VDC (24 VDC nom.)	3.3 VDC	10'000 mA	90 %
TEN 40-2411WIR		5 VDC	8000 mA	91 %
TEN 40-2412WIR		12 VDC	3333 mA	92 %
TEN 40-2413WIR		15 VDC	2666 mA	92 %
TEN 40-2415WIR		24 VDC	1666 mA	91 %
TEN 40-2422WIR		± 12 VDC	±1666 mA	90 %
TEN 40-2423WIR		±15 VDC	±1333 mA	90 %
TEN 40-2425WIR	±24 (48*) VDC	±833 mA	91 %	
TEN 40-4810WIR	18 - 75 VDC (48 VDC nom.)	3.3 VDC	10'000 mA	90 %
TEN 40-4811WIR		5 VDC	8000 mA	91 %
TEN 40-4812WIR		12 VDC	3333 mA	92 %
TEN 40-4813WIR		15 VDC	2666 mA	92 %
TEN 40-4815WIR		24 VDC	1666 mA	91 %
TEN 40-4822WIR		± 12 VDC	±1666 mA	90 %
TEN 40-4823WIR		±15 VDC	±1333 mA	90 %
TEN 40-4825WIR	±24 (48*) VDC	±833 mA	91 %	
TEN 40-7210WIR	43 - 160 VDC (110 VDC nom.)	3.3 VDC	10'000 mA	88 %
TEN 40-7211WIR		5 VDC	8000 mA	89 %
TEN 40-7212WIR		12 VDC	3333 mA	90 %
TEN 40-7213WIR		15 VDC	2666 mA	91 %
TEN 40-7215WIR		24 VDC	1666 mA	90 %
TEN 40-7222WIR		± 12 VDC	±1666 mA	89 %
TEN 40-7223WIR		±15 VDC	±1333 mA	89 %
TEN 40-7225WIR	±24 (48*) VDC	±833 mA	91 %	

- 2.0 x 1.0 x 0.4" metal package
- Ultra wide 4:1 input voltage range 9–36, 18–75, 43–160 VDC
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- High efficiency up to 92%
- No minimum load required
- -40°C to +85°C temperature range
- Under voltage lock-out circuit
- Remote On/Off
- Vtrim and remote on/off

Pinout		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	-Vout	Common
6	trim	-Vout


* For heat-sink option drawing see data sheet

*The outputs can also be used in serial circuit for single 48 VDC operation. Free-wheeling diodes are not necessary but recommended for increased performance for start-up with inductive/capacitive load and at dynamic load operation.

TEN 40WIRH

NEW!

40 Watt

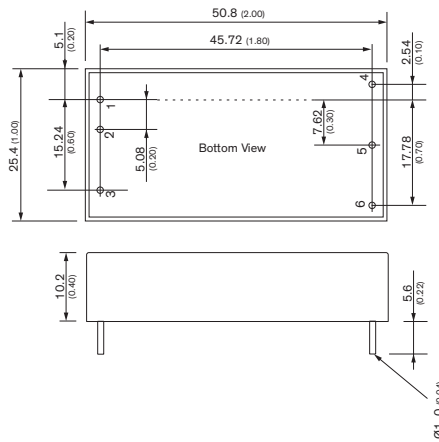


Model	Input Voltage Range	Output Vnom	I _{max}	Efficiency
TEN 40-11011WIRH	36 - 160 VDC (110 VDC nom.)	5.1 VDC	8000 mA	88%
TEN 40-11012WIRH		12 VDC	3333 mA	89%
TEN 40-11013WIRH		15 VDC	2666 mA	90%
TEN 40-11015WIRH		24 VDC	1666 mA	89%
TEN 40-11022WIRH		±12 VDC	±1666 mA	88%
TEN 40-11023WIRH		±15 VDC	±1333 mA	89%

- 2.0 x 1.0 x 0.4" metal package
- Ultra wide 4:1 input (36-160 VDC)
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- High efficiency up to 90%
- -40°C to +70°C temperature range
- Under voltage lock-out circuit
- Remote On/Off
- Vtrim and remote on/off

Pinout		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	-Vout	-Vout
6	Trim	-Vout

TEP 40UIR

40 Watt

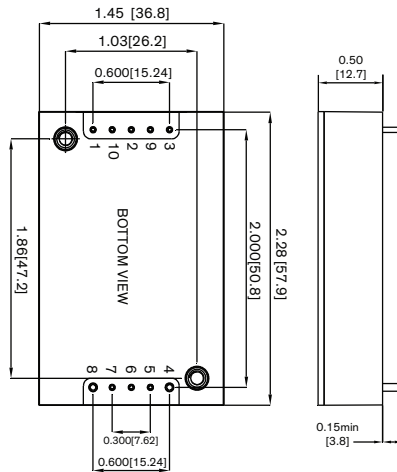



Model	Input Voltage Range	Output Vnom	I _{max}	Efficiency
TEP 40-3611UIR	9 - 75 VDC	5VDC	8 A	89 %
TEP 40-3612UIR		12 VDC	3.33 A	91 %
TEP 40-3613UIR		15 VDC	2.67 A	90 %
TEP 40-3615UIR		24 VDC	1.67 A	90 %
TEP 40-3618UIR		48 VDC	0.83 A	92 %
TEP 40-7211UIR	14 - 160 VDC	5 VDC	8 A	89 %
TEP 40-7212UIR		12 VDC	3.33 A	90 %
TEP 40-7213UIR		15 VDC	2.67 A	90 %
TEP 40-7215UIR		24 VDC	1.67 A	90 %
TEP 40-7218UIR		48 VDC	0.83 A	90 %

- Compact 2.30 x 1.45 x 0.50" package
- Ultra-wide 12:1 input voltage range 9–75, 14–160 VDC
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- I/O-isolation 3'000 VAC
- High efficiency up to 92%
- -40°C to +85°C temperature range
- Under-voltage lockout circuit
- Vtrim (+10/-20%), sense, remote on/off

Pin Connection			
Pin	Function	Pin	Function
1	-Vin	6	Trim
2	Remote	7	+Sense
3	+Vin	8	+Vout
4	-Vout	9	Bus
5	-Sense	10	UVLO

TEN 60WIR

60 Watt

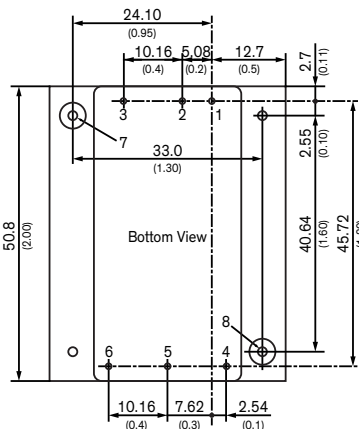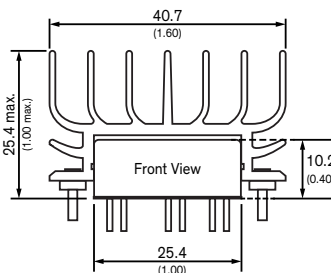


Model	Input Voltage Range	Output Vnom	I _{max}	Efficiency	
TEN 60-2411WIR	9 - 36 VDC	5 VDC	12 A	91 %	
TEN 60-2412WIR		12 VDC	5 A	93 %	
TEN 60-2413WIR		15 VDC	4 A	93 %	
TEN 60-2415WIR		24 VDC	2.5 A	90.5 %	
TEN 60-2418WIR		48 VDC	1.25 A	91.5 %	
TEN 60-2422WIR	18 - 75 VDC	±12 VDC	±2.5 A	90.5 %	
TEN 60-2423WIR		±15 VDC	±2 A	90.5 %	
TEN 60-2425WIR		±24 VDC	±1.25 A	91.5 %	
TEN 60-4811WIR		36 - 160 VDC	5 VDC	12 A	91.5 %
TEN 60-4812WIR			12 VDC	5 A	92.5 %
TEN 60-4813WIR	15 VDC		4 A	94 %	
TEN 60-4815WIR	24 VDC		2.5 A	91.5 %	
TEN 60-4818WIR	48 VDC		1.25 A	92 %	
TEN 60-4822WIR	36 - 160 VDC	±12 VDC	±2.5 A	91.5 %	
TEN 60-4823WIR		±15 VDC	±2 A	91.5 %	
TEN 60-4825WIR		±24 VDC	±1.25 A	92 %	
TEN 60-7211WIR		36 - 160 VDC	5 VDC	12 A	91 %
TEN 60-7212WIR			12 VDC	5 A	92 %
TEN 60-7213WIR	15 VDC		4 A	92 %	
TEN 60-7215WIR	24 VDC		2.5 A	90.5 %	
TEN 60-7218WIR	48 VDC		1.25 A	91 %	
TEN 60-7222WIR	36 - 160 VDC	±12 VDC	±2.5 A	90.5 %	
TEN 60-7223WIR		±15 VDC	±2 A	90.5 %	
TEN 60-7225WIR		±24 VDC	±1.25 A	91 %	

- 2.00 x 1.60 x 1.00" package, includes heatsink
- Ultra-wide 4:1 input voltage range 9–36, 18–75, 36–160 VDC
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- I/O-isolation 3'000 VDC
- High efficiency up to 91%
- -40°C to +85°C temperature range, full-load operation up to 70°C
- Under-voltage lock out circuit
- Vtrim and remote on/off

Pinout		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	-Vout	Common
6	Trim	-Vout

TEP 60UIR

60 Watt

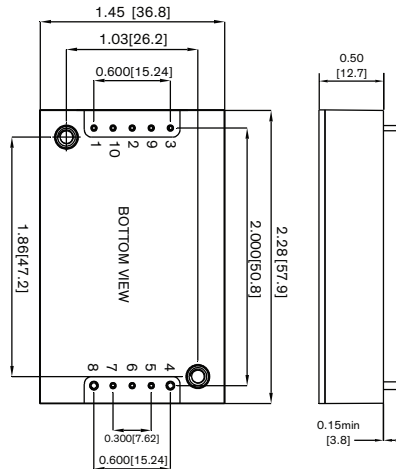


Model	Input Voltage Range	Output Vnom	Imax	Efficiency
TEP 60-361UIR	9 - 75 VDC	5VDC	12 A	89 %
TEP 60-3612UIR		12 VDC	5 A	89 %
TEP 60-3613UIR		15 VDC	4 A	89 %
TEP 60-3615UIR		24 VDC	2.5 A	90 %
TEP 60-3618UIR		48VDC	1.25 A	92 %
TEP 60-721UIR	14 - 160 VDC	5 VDC	12 A	89 %
TEP 60-7212UIR		12 VDC	5 A	89 %
TEP 60-7213UIR		15 VDC	4 A	89 %
TEP 60-7215UIR		24 VDC	2.5 A	90 %
TEP 60-7218UIR		48 VDC	1.25 A	90 %

- Compact 2.30 x 1.45 x 0.50" package
- Ultra-wide 12:1 input voltage range 9–75, 14–160 VDC
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- I/O-isolation 3'000 VAC
- High efficiency up to 92%
- -40°C to +85°C temperature range
- Under-voltage lockout circuit
- Vtrim (+10/-20%), sense, remote on/off

Pin Connection			
Pin	Function	Pin	Function
1	-Vin	6	Trim
2	Remote	7	+Sense
3	+Vin	8	+Vout
4	-Vout	9	Bus
5	-Sense	10	UVLO

TEP 75WI


75 Watt

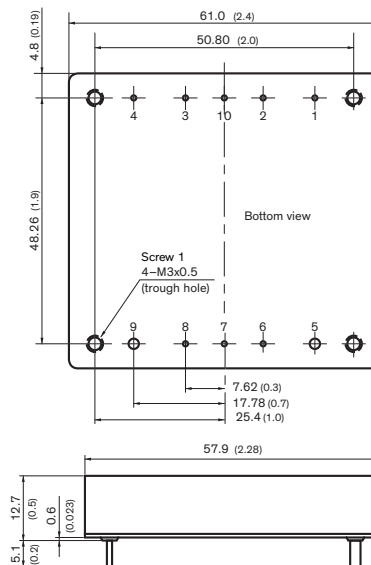

Model	Input Voltage Range	Output Vnom	Imax	Efficiency
TEP 75-2411WI	9 - 36 VDC (24 VDC nom.)	5 VDC	15'000 mA	88 %
TEP 75-2412WI		12 VDC	6300 mA	88 %
TEP 75-2413WI		15 VDC	5000 mA	88 %
TEP 75-2415WI		24 VDC	3200 mA	87 %
TEP 75-2416WI		28 VDC	2700 mA	87 %
TEP 75-2418WI	48 VDC	1600 mA	87 %	
TEP 75-4811WI	18 - 75 VDC (48 VDC nom.)	5 VDC	15'000 mA	90 %
TEP 75-4812WI		12 VDC	6300 mA	90 %
TEP 75-4813WI		15 VDC	5000 mA	89 %
TEP 75-4815WI		24 VDC	3200 mA	88 %
TEP 75-4816WI		28 VDC	2700 mA	88 %
TEP 75-4818WI	48 VDC	1600 mA	87 %	
TEP 75-7211WI	43 - 160 VDC (110 VDC nom.)	5 VDC	15'000 mA	91 %
TEP 75-7212WI		12 VDC	6300 mA	91 %
TEP 75-7213WI		15 VDC	5000 mA	91 %
TEP 75-7215WI		24 VDC	3200 mA	90 %
TEP 75-7216WI		28 VDC	2700 mA	90 %
TEP 75-7218WI	48 VDC	1600 mA	90 %	

- 2.28 x 2.40 x 0.50" metal case
- Ultra wide 4:1 input voltage ranges 9–36, 18–75, 43–160 VDC
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- Very high efficiency up to 91%
- No minimum load and soft start
- Under voltage lock-out circuit
- Vtrim (+10/-20%), sense, remote on/off


Pinout			
Pin	Function	Pin	Function
1	-Vin (GND)	6	-Sense*
2	Case	7	Trim
3	Remote	8	+Sense*
4	+Vin (Vcc)	9	+Vout
5	-Vout		

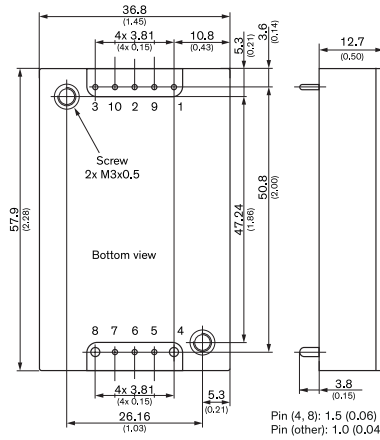

- 2.3 x 1.45 x 0.50" metal case
- Ultra-wide 12:1 input (9~75 / 14~160 VDC)
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- -40°C to +85°C Operation
- Very high efficiency up to 92%
- I/O-isolation 3'000 VAC
- No minimum load and soft start
- Under voltage lock-out circuit
- Under voltage lock-out
- Vtrim (+10/-20%), sense, remote on/off

Pin Connection		
Pin	Function	Diameter
1	-Vin	0.04 Inch
2	Ctrl	0.04 Inch
3	+Vin	0.04 Inch
4	-Vout	0.06 Inch
5	-Sense	0.04 Inch
6	Trim	0.04 Inch
7	+Sense	0.04 Inch
8	+Vout	0.06 Inch
9	Bus (option)	0.04 Inch
10	UVLO (option)	0.04 Inch


Model	Input Voltage Range	Output Vnom	Imax	Efficiency
TEP 100-3611UIR	9 - 75 VDC	5VDC	20 A	87 %
TEP 100-3612UIR		12 VDC	8.35 A	88 %
TEP 100-3613UIR		15 VDC	6.7 A	88 %
TEP 100-3615UIR		24 VDC	4.2 A	88 %
TEP 100-3618UIR		48 VDC	2.1 A	89 %
TEP 100-7211UIR	14 - 160 VDC	5 VDC	20 A	87 %
TEP 100-7212UIR		12 VDC	8.35 A	88 %
TEP 100-7213UIR		15 VDC	6.7 A	88 %
TEP 100-7215UIR		24 VDC	4.2 A	88 %
TEP 100-7218UIR		48 VDC	2.1 A	89 %

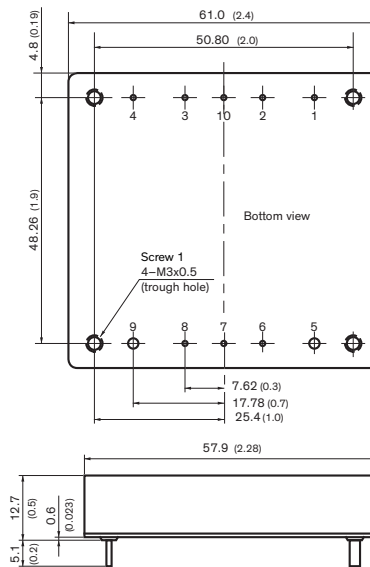

- 2.28 x 2.40 x 0.50" metal case
- Ultra wide 4:1 input voltage ranges 9-36, 18-75, 43-160 VDC
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- Very high efficiency up to 93%
- No minimum load and soft start
- Under voltage lock-out circuit
- Vtrim (+10/-20%), sense, remote on/off

Pinout			
Pin	Function	Pin	Function
1	-Vin (GND)	6	-Sense*
2	Case	7	Trim
3	Remote	8	+Sense*
4	+Vin (Vcc)	9	+Vout
5	-Vout		


Model	Input Voltage Range	Output Vnom	Imax	Efficiency
TEP 100-2411WIR	9 - 36 VDC (24 VDC nom.)	5 VDC	20'000 mA	93 %
TEP 100-2412WIR		12 VDC	8400 mA	90 %
TEP 100-2415WIR		24 VDC	4200 mA	90 %
TEP 100-2416WIR		28 VDC	3600 mA	90 %
TEP 100-2418WIR		48 VDC	2100 mA	90 %
TEP 100-4812WIR	18 - 75 VDC (48 VDC nom.)	12 VDC	8400 mA	90 %
TEP 100-4815WIR		24 VDC	4200 mA	90 %
TEP 100-4816WIR		28 VDC	3600 mA	92 %
TEP 100-4818WIR		48 VDC	2100 mA	91 %
TEP 100-7212WIR	43 - 160 VDC (110 VDC nom.)	12 VDC	8400 mA	90 %
TEP 100-7215WIR		24 VDC	4200 mA	90 %
TEP 100-7216WIR		28 VDC	3600 mA	90 %
TEP 100-7218WIR		48 VDC	2100 mA	91 %

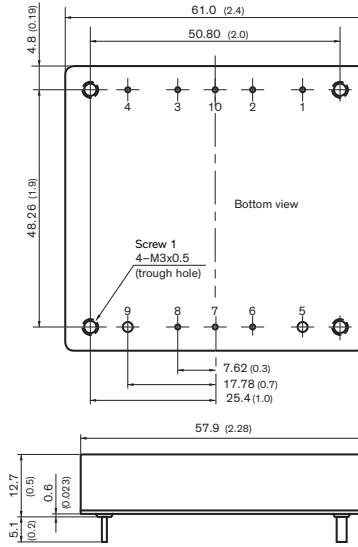

Model	Input Voltage Range	Output		Efficiency
		Vnom	I _{max}	
TEP 150-7211UIR	16 – 160 VDC	5 VDC	30'000 mA	91%
TEP 150-7212UIR		12 VDC	12'500 mA	93%
TEP 150-7213UIR		15 VDC	10'000 mA	92%
TEP 150-7215UIR		24 VDC	6300 mA	89%
TEP 150-7218UIR		48 VDC	3200 mA	93%

- 2.28 x 2.40 x 0.50" metal case
- Ultra-wide 10:1 input (16 – 160 VDC)
- Bus pin to easily extend hold-up time
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- -40°C to +75°C Operation
- Very high efficiency up to 93%
- I/O-isolation 3'000 VAC
- No minimum load and soft start
- Under voltage lock-out circuit
- Adjustable under voltage lock-out
- Vtrim (+10/-20%), sense, remote on/off


Pinout			
Pin	Function	Pin	Function
1	-Vin (GND)	6	-Sense*
2	Case	7	Trim
3	Remote	8	+Sense*
4	+Vin (Vcc)	9	+Vout
5	-Vout		

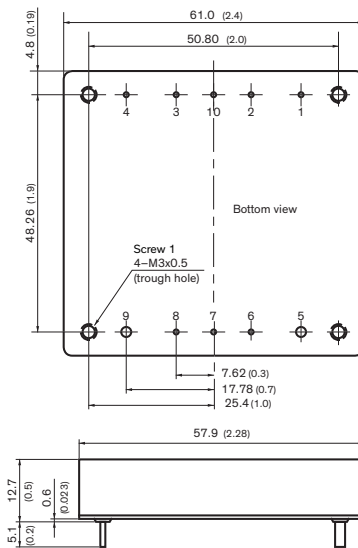

Model	Input Voltage Range	Output		Efficiency
		Vnom	I _{max}	
TEP 160-2412WIR	9 - 36 VDC (24 VDC nom.)	12 VDC	12'000 mA	90 %
TEP 160-2413WIR		15 VDC	9500 mA	91 %
TEP 160-2415WIR		24 VDC	6000 mA	90 %
TEP 160-2416WIR		28 VDC	5000 mA	90 %
TEP 160-2418WIR		48 VDC	3000 mA	90 %
TEP 160-4812WIR	18 - 75 VDC (48 VDC nom.)	12 VDC	13'000 mA	91 %
TEP 160-4813WIR		15 VDC	10'000 mA	91 %
TEP 160-4815WIR		24 VDC	6500 mA	91 %
TEP 160-4816WIR		28 VDC	5500 mA	91 %
TEP 160-4818WIR		48 VDC	3200 mA	91 %
TEP 160-7212WIR	43 - 160 VDC (110 VDC nom.)	12 VDC	15'000 mA	90 %
TEP 160-7213WIR		15 VDC	12'000 mA	90 %
TEP 160-7215WIR		24 VDC	7500 mA	90 %
TEP 160-7216WIR		28 VDC	6500 mA	90 %
TEP 160-7218WIR		48 VDC	3800 mA	90 %

- 2.28 x 2.40 x 0.50" metal case
- Ultra wide 4:1 input voltage ranges 9–36, 18–75, 43–160 VDC
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- Very high efficiency up to 91%
- No minimum load and soft start
- Under voltage lock-out circuit
- Vtrim (+10/-20%), sense, remote on/off


Pinout			
Pin	Function	Pin	Function
1	-Vin (GND)	6	-Sense*
2	Case	7	Trim
3	Remote	8	+Sense*
4	+Vin (Vcc)	9	+Vout
5	-Vout		

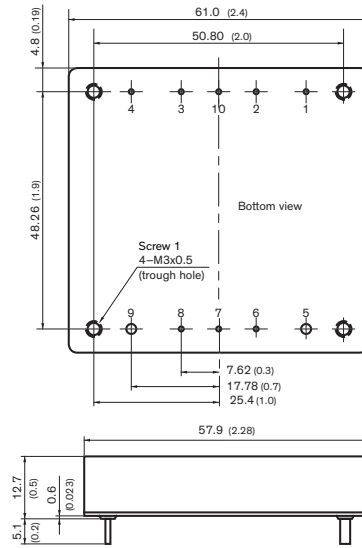

Model	Input Voltage Range	Output		Efficiency
		Vnom	I _{max}	
TEP 200-7211UIR	16 – 160 VDC	5 VDC	40'000 mA	90%
TEP 200-7212UIR		12 VDC	16'800 mA	92%
TEP 200-7213UIR		15 VDC	13'400 mA	91%
TEP 200-7215UIR		24 VDC	8400 mA	90%
TEP 200-7218UIR		48 VDC	4200 mA	92%

- 2.28 x 2.40 x 0.50" metal case
- Ultra-wide 10:1 input (16 – 160 VDC)
- Bus pin to easily extend hold-up time
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- -40°C to +70°C Operation
- Very high efficiency up to 92%
- No minimum load and soft start
- Under voltage lock-out circuit
- Adjustable under voltage lock-out
- Vtrim (+10/-20%), sense, remote on/off

Pinout			
Pin	Function	Pin	Function
1	-Vin (GND)	6	-Sense*
2	Case	7	Trim
3	Remote	8	+Sense*
4	+Vin (Vcc)	9	+Vout
5	-Vout		

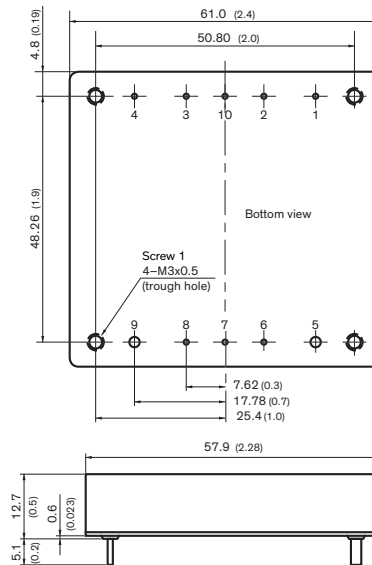

Model	Input Voltage Range	Output		Efficiency
		Vnom	I _{max}	
TEP 200-2412WIR	9 - 36 VDC (24 VDC nom.)	12 VDC	15'000 mA	89 %
TEP 200-2413WIR		15 VDC	12'000 mA	90 %
TEP 200-2415WIR		24 VDC	7500 mA	90 %
TEP 200-2416WIR		28 VDC	6500 mA	90 %
TEP 200-2418WIR		48 VDC	3700 mA	89 %
TEP 200-4812WIR	18 - 75 VDC (48 VDC nom.)	12 VDC	18'000 mA	90 %
TEP 200-4813WIR		15 VDC	14'000 mA	91 %
TEP 200-4815WIR		24 VDC	9000 mA	90 %
TEP 200-4816WIR		28 VDC	7500 mA	91 %
TEP 200-4818WIR	48 VDC	4500 mA	90 %	
TEP 200-7212WIR	43 - 160 VDC (110 VDC nom.)	12 VDC	20'000 mA	89 %
TEP 200-7213WIR		15 VDC	16'000 mA	90 %
TEP 200-7215WIR		24 VDC	10'000 mA	89 %
TEP 200-7216WIR		28 VDC	8500 mA	90 %
TEP 200-7218WIR		48 VDC	5000 mA	89 %

- 2.28 x 2.40 x 0.50" metal case
- Ultra wide 4:1 input voltage ranges 9–36, 18–75, 43–160 VDC
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- EN 45545-2 fire behavior
- Very high efficiency up to 91%
- No minimum load and soft start
- Under voltage lock-out circuit
- Vtrim (+10/-20%), sense, remote on/off

Pinout			
Pin	Function	Pin	Function
1	-Vin (GND)	6	-Sense*
2	Case	7	Trim
3	Remote	8	+Sense*
4	+Vin (Vcc)	9	+Vout
5	-Vout		

Ruggedized DC/DC Converters Chassis Mount Models

EN 50155 Railway Certified | IEC/UL/EN 62368-1 Safety Approvals
EN61373 | MIL-810F Shock/Vibration/Thermal


20~300 Watt Products featuring:

- 4:1 and Ultra-Wide Input Ranges
- Extended Operating Temperatures
- Tightly regulated outputs
- $\geq 3,000$ VDC Isolation
- Over-Current & Short Circuit Protection
- 3 Year Warranty



TEQ 20WIR

20 Watt

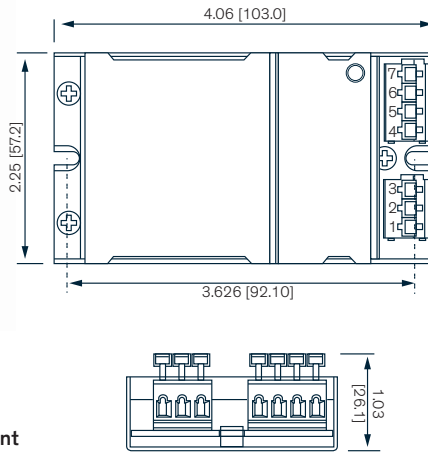


Model	Input Voltage Range	Output		Efficiency
		Vnom	I _{max}	
TEQ 20-2411WIR	9 - 36 VDC (24 VDC nom.)	5 VDC	4000 mA	87 %
TEQ 20-2412WIR		12 VDC	1670 mA	88 %
TEQ 20-2413WIR		15 VDC	1330 mA	87 %
TEQ 20-2415WIR		24 VDC	833 mA	87 %
TEQ 20-2422WIR		±12 VDC	833 mA	87 %
TEQ 20-2423WIR	±15 VDC	667 mA	88 %	
TEQ 20-4811WIR	18 - 75 VDC (48 VDC nom.)	5 VDC	4500 mA	87 %
TEQ 20-4812WIR		12 VDC	1670 mA	88 %
TEQ 20-4813WIR		15 VDC	1330 mA	88 %
TEQ 20-4815WIR		24 VDC	833 mA	87 %
TEQ 20-4822WIR		±12 VDC	833 mA	87 %
TEQ 20-4823WIR	±15 VDC	667 mA	88 %	
TEQ 20-7211WIR	43 - 160 VDC (110 VDC nom.)	5 VDC	4500 mA	86 %
TEQ 20-7212WIR		12 VDC	1670 mA	87 %
TEQ 20-7213WIR		15 VDC	1330 mA	87 %
TEQ 20-7215WIR		24 VDC	833 mA	87 %
TEQ 20-7222WIR		±12 VDC	833 mA	87 %
TEQ 20-7223WIR	±15 VDC	667 mA	88 %	

- 4.06 x 2.25 x 1.03" power block with excellent thermal performance
- -40°C to +93°C temperature range
- Ultra wide 4:1 input voltage range
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- Excellent efficiency up to 88%
- Input filter (EN 55032 class B)
- I/O isolation up to 2,250 VDC
- Under voltage lock-out circuit
- Protection against overvoltage, overtemperature and short circuit
- Output LED indicator

Pinout		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin (GND)	-Vin (GND)
3	NC	NC
4	NC	-Vout
5	-Vout	Common
6	+Vout	Common
7	NC	+Vout

TEQ 40WIR



40 Watt

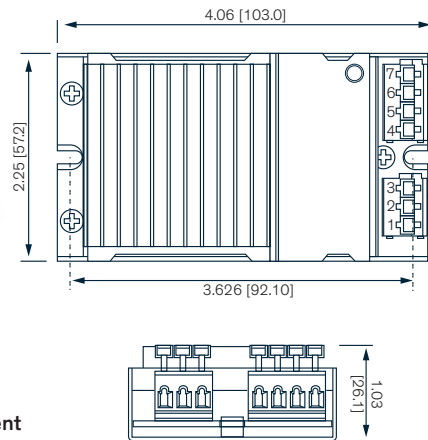

Model	Input Voltage Range	Output		Efficiency
		Vnom	I _{max}	
TEQ 40-2411WIR	9 - 36 VDC (24 VDC nom.)	5 VDC	8000 mA	90 %
TEQ 40-2412WIR		12 VDC	3330 mA	91 %
TEQ 40-2413WIR		15 VDC	2670 mA	91 %
TEQ 40-2415WIR		24 VDC	1670 mA	90 %
TEQ 40-2422WIR		±12 VDC	1670 mA	89 %
TEQ 40-2423WIR	±15 VDC	1330 mA	89 %	
TEQ 40-2425WIR	±24 VDC	830 mA	90 %	
TEQ 40-4811WIR	18 - 75 VDC (48 VDC nom.)	5 VDC	8000 mA	90 %
TEQ 40-4812WIR		12 VDC	3330 mA	91 %
TEQ 40-4813WIR		15 VDC	2670 mA	91 %
TEQ 40-4815WIR		24 VDC	1670 mA	90 %
TEQ 40-4822WIR		±12 VDC	1670 mA	89 %
TEQ 40-4823WIR	±15 VDC	1330 mA	89 %	
TEQ 40-4825WIR	±24 VDC	830 mA	90 %	
TEQ 40-7211WIR	43 - 160 VDC (110 VDC nom.)	5 VDC	8000 mA	88 %
TEQ 40-7212WIR		12 VDC	3330 mA	90 %
TEQ 40-7213WIR		15 VDC	2670 mA	90 %
TEQ 40-7215WIR		24 VDC	1670 mA	89 %
TEQ 40-7222WIR		±12 VDC	1670 mA	88 %
TEQ 40-7223WIR	±15 VDC	1330 mA	88 %	
TEQ 40-7225WIR	±24 VDC	830 mA	90 %	

- 4.06 x 2.25 x 1.03" power block with excellent thermal performance
- -40°C to +92°C temperature range
- Ultra wide 4:1 input voltage range
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- Excellent efficiency up to 91%
- Input filter (EN 55032, class B)
- I/O isolation up to 3,000 VDC
- Under voltage lock-out circuit
- Protection against overvoltage, overtemperature and short circuit
- Output LED indicator

Pinout		
Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin (GND)	-Vin (GND)
3	NC	NC
4	NC	-Vout
5	-Vout	Common
6	+Vout	Common
7	NC	+Vout

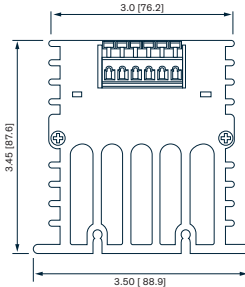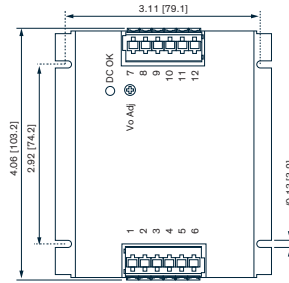



Model	Input Voltage Range	Output Vnom	Output I _{max}	Efficiency typ.
TEQ 100-2412WIR	10 - 36 VDC (24 VDC nom.)	12 VDC	8400 mA	90 %
TEQ 100-2415WIR		24 VDC	4200 mA	90 %
TEQ 100-2416WIR		28 VDC	3600 mA	90 %
TEQ 100-2418WIR		48 VDC	2100 mA	90 %
TEQ 100-4812WIR	19 - 75 VDC (48 VDC nom.)	12 VDC	8400 mA	90 %
TEQ 100-4815WIR		24 VDC	4200 mA	90 %
TEQ 100-4816WIR		28 VDC	3600 mA	90 %
TEQ 100-4818WIR		48 VDC	2100 mA	90 %
TEQ 100-7212WIR	43 - 160 VDC (110 VDC nom.)	12 VDC	8400 mA	89 %
TEQ 100-7215WIR		24 VDC	4200 mA	90 %
TEQ 100-7216WIR		28 VDC	3600 mA	90 %
TEQ 100-7218WIR		48 VDC	2100 mA	90 %

- 4.06 x 3.50 x 3.45" power block with excellent thermal performance
- -40°C to +85°C operation without derating
- Ultra wide 4:1 input voltage range
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- Excellent efficiency up to 90%
- Input filter meet EN 55032, class A
- I/O isolation 1591 VAC
- Under voltage lock-out circuit
- Vtrim (+10/-20%), sense, remote on/off

Pin Connection

Terminal	Pin Function	Terminal	Pin Function
1, 2	-Vin	7, 8	-Vout
3	NC	9	-Sense*
4	On/Off Ctrl	10	+Sense*
5, 6	+Vin	11, 12	+Vout

- * Sense line to be connected to the output either at the module or at the load under regard of polarity.
- The current rating of the terminal block is 15 A/pole.
- Using 2 poles in parallel if the peak output current can exceed 15 A.
- Wire size shall be selected to withstand the peak output current (I_{out max} + Current limitation).

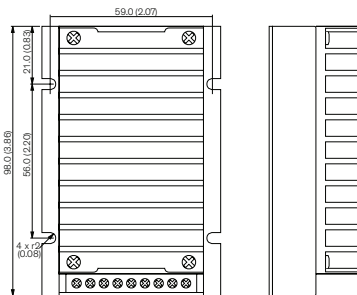

Model	Input Voltage Range	Output Vnom	Output I _{max}	Efficiency
TEP 150-2412WI	9 - 36 VDC (24 VDC nom.)	12 VDC	12'500 mA	86 %
TEP 150-2413WI		15 VDC	10'000 mA	86 %
TEP 150-2415WI		24 VDC	6300 mA	87 %
TEP 150-2416WI		28 VDC	5400 mA	87 %
TEP 150-2418WI	48 VDC	3200 mA	86 %	
TEP 150-4812WI	18 - 75 VDC (48 VDC nom.)	12 VDC	12'500 mA	88 %
TEP 150-4813WI		15 VDC	10'000 mA	89 %
TEP 150-4815WI		24 VDC	6300 mA	89 %
TEP 150-4816WI		28 VDC	5400 mA	89 %
TEP 150-4818WI	48 VDC	3200 mA	88 %	
TEP 150-7212WI	43 - 160 VDC (110 VDC nom.)	12 VDC	12'500 mA	88 %
TEP 150-7213WI		15 VDC	10'000 mA	89 %
TEP 150-7215WI		24 VDC	6300 mA	89 %
TEP 150-7216WI		28 VDC	5400 mA	89 %
TEP 150-7218WI	48 VDC	3200 mA	88 %	



- 3.86 x 2.56 x 1.6" Shielded metal case
- Ultra wide 4:1 input voltage ranges
- 9-36, 18-75, 43-160 VDC
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- Constant current output characteristic
- Optional input filter for EN 55032 class B
- -40°C to +75°C temperature range
- Under voltage lock-out, overtemperature & reverse input protection
- Remote on/off and Vtrim (+20%)
- Easy chassis and wall mounting

Pinout

Pin	Function	Recommended Wire
1	+ Vin	14 - 16 AWG
2	+ Vin	14 - 16 AWG
3	- Vin	14 - 16 AWG
4	- Vin	14 - 16 AWG
5	Remote	14 - 24 AWG
6	+ Vout	14 - 16 AWG
7	- Vout	14 - 16 AWG
8	Trim	14 - 24 AWG
9	Trim	14 - 24 AWG

TEQ 160WIR

153~182 Watt

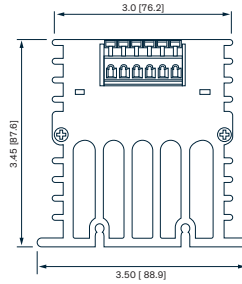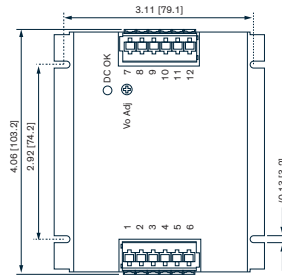

- 4.06 x 3.50 x 3.45" power block with excellent thermal convection
- -40°C to +85°C operation without derating
- Ultra wide 4:1 input voltage range
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- Excellent efficiency up to 90%
- Input filter meet EN 55032, class A
- I/O isolation 1591 VAC
- Under voltage lock-out circuit
- Vtrim (+10/-20%), sense, remote on/off

Pin Connection



Terminal	Pin Function	Terminal	Pin Function
1, 2	-Vin	7, 8	-Vout
3	NC	9	-Sense*
4	On/Off Ctrl	10	+Sense*
5, 6	+Vin	11, 12	+Vout

Model	Input Voltage Range	Output Vnom	Imax	Efficiency typ.
TEQ 160-4812WIR	19 - 75 VDC (48 VDC nom.)	12 VDC	13'000 mA	90 %
TEQ 160-4815WIR		24 VDC	6500 mA	90 %
TEQ 160-4816WIR		28 VDC	5500 mA	90 %
TEQ 160-4818WIR	48 VDC	48 VDC	3200 mA	90 %
TEQ 160-7212WIR	43 - 160 VDC (110 VDC nom.)	12 VDC	15'000 mA	89 %
TEQ 160-7215WIR		24 VDC	7500 mA	89 %
TEQ 160-7216WIR		28 VDC	6500 mA	89 %
TEQ 160-7218WIR	48 VDC	48 VDC	3800 mA	89 %

- * Sense line to be connected to the output either at the module or at the load under regard of polarity.
- The current rating of the terminal block is 15 A/pole.
- Using 2 poles in parallel if the peak output current can exceed 15 A.
- Wire size shall be selected to withstand the peak output current (Iout max + Current limitation).

TEQ 200WIR

200 Watt

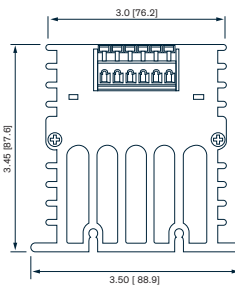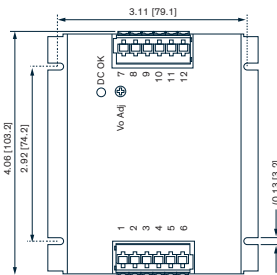


- 4.06 x 3.50 x 3.45" power block with excellent thermal convection
- -40°C to +85°C operation without derating
- Ultra wide 4:1 input voltage range
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- Excellent efficiency up to 90%
- Input filter meet EN 55032, class A
- I/O isolation 1591 VAC
- Under voltage lock-out circuit
- Vtrim (+10/-20%), sense, remote on/off

Pin Connection


Terminal	Pin Function	Terminal	Pin Function
1, 2	-Vin	7, 8	-Vout
3	NC	9	-Sense*
4	On/Off Ctrl	10	+Sense*
5, 6	+Vin	11, 12	+Vout

Model	Input Voltage Range	Output Vnom	Imax	Efficiency typ.
TEQ 200-4812WIR	19 - 75 VDC (48 VDC nom.)	12 VDC	18'000 mA	89 %
TEQ 200-4815WIR		24 VDC	9000 mA	89 %
TEQ 200-4816WIR		28 VDC	7500 mA	90 %
TEQ 200-4818WIR	48 VDC	48 VDC	4500 mA	89 %
TEQ 200-7212WIR	43 - 160 VDC (110 VDC nom.)	12 VDC	20'000 mA	88 %
TEQ 200-7215WIR		24 VDC	10'000 mA	88 %
TEQ 200-7216WIR		28 VDC	8500 mA	89 %
TEQ 200-7218WIR	48 VDC	48 VDC	5000 mA	88 %

- * Sense line to be connected to the output either at the module or at the load under regard of polarity.
- The current rating of the terminal block is 15 A/pole.
- Using 2 poles in parallel if the peak output current can exceed 15 A.
- Wire size shall be selected to withstand the peak output current (Iout max + Current limitation).

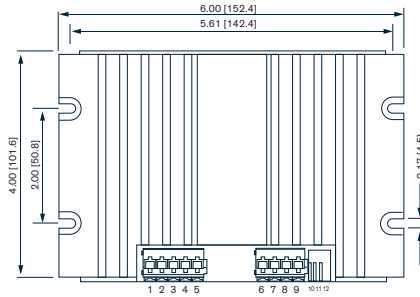

- 6.00 x 4.00 x 1.52" power block with excellent thermal performance
- -40°C to +80°C temperature range
- Ultra wide 4:1 input voltage range
- EN 50155 railway approved
- IEC/EN/UL 62368-1 approved
- EN 61373 thermal shock and vibration
- Excellent efficiency up to 92%
- Constant current output characteristic for battery load applications
- Power sharing (up to 3 pcs in parallel)
- Input filter meet EN 55032, class A
- Under voltage lock-out circuit
- Vtrim ($\pm 20\%$), sense, remote on/off



Pin Connection		
Terminal	Pin Function	Recommended Wire
1, 2	+Vin	12 - 16 AWG
3, 4	-Vin (GND)	12 - 16 AWG
5	On/Off Ctrl	12 - 16 AWG
6, 7	+Vout	12 - 16 AWG
8, 9	-Vout	12 - 16 AWG
10	+Sense*	20 - 28 AWG
11	LS (Loadshare)	20 - 28 AWG
12	-Sense*	20 - 28 AWG

Model	Input Voltage Range	Output		Efficiency typ.
		Vnom	I _{max}	
TEQ 300-4812WIR	19 - 75 VDC (48 VDC nom.)	12 VDC	25'000 mA	89 %
TEQ 300-4815WIR		24 VDC	12'500 mA	92 %
TEQ 300-4816WIR		28 VDC	10'800 mA	91 %
TEQ 300-4818WIR	43 - 160 VDC (110 VDC nom.)	48 VDC	6300 mA	92 %
TEQ 300-7212WIR		12 VDC	25'000 mA	89 %
TEQ 300-7215WIR		24 VDC	12'500 mA	91 %
TEQ 300-7216WIR		28 VDC	10'800 mA	91 %
TEQ 300-7218WIR	48 VDC	6300 mA	92 %	

* Sense line to be connected to the output either at the module or at the load under regard of polarity.
 • Wire size shall be selected to withstand the peak current (I_{out max} + Current limitation).

TRACO POWER

TRACO POWER dedicated to design and production of high quality, state-of-the-art DC / DC & AC / DC power conversion products. Our mission is to provide optimal power supply solutions for specific applications with regard to performance, quality, cost and functionality.

TRACO POWER stocks an average of USD 25+ million in available finished goods inventory for immediate shipment through our distribution partners.

TRACO POWER offers extended product life-cycles, typically 10+ years, and our products are supported by a 3 or 5 year product warranty. We understand our customers require a high quality solution as well as a diverse product offering, availability from stock, extended life-cycles and a strong commitment to quality in the form of extended warranty to support their business.

Our other selection guides / catalogues



International Office

Traco Electronic AG
Sihlbruggstrasse 111
6340 Baar
Switzerland

P +41 43 311 45 11
F +41 43 311 45 45
info@tracopower.com

North America Office

Traco Power North America, Inc.
2025 Gateway Place #330
San Jose, CA 95110
USA

P +1 (408) 916-4570
F +1 (408) 916-4571
salesusa@tracopower.com

French Office

Traco Power France
17, rue de la Vanne
92120 Montrouge
France

M +33 (0)6 72 11 52 21
info@tracopower.fr

German Office

Traco Electronic GmbH
Oskar-Messter-Str. 20a
85737 Ismaning/München
Germany

P +49 89 96 11 82-0
F +49 89 96 11 82-20
info@tracopower.de

Design & Development

Traco Power Solutions Ltd.
Whitemill Industrial Estate
Whitemill Road, Wexford
Y35 YH66, Ireland

P +353 53 9167 700
F +353 53 9167 701
info@tracopower.ie